


## Datasheet PGU 10V-1A

As part of a research project in 2002, we have developed our new **PGU-series**. The aim of this development was to standardize the previous models of the IMP-series and the 1000 series in order to build them modular and flexible as well as to equip them with some additional features. Thereby we did not want to waive the tried, like the manual operation. Thus, the recent circuits were expanded by the function of automatic measuring range switching. In addition, the devices have been designed so that they can be equipped with an interface for the computer control.

The device design is very flexible and offers the possibility to build different types out of a base device.

Our cheap base model is the **PGU 10V-1A**. The device is a standard potentiostat / galvanostat. It provides an output voltage of  $\pm 12V$ , a maximum current of 1000mA and is suitable for the commonly used standard measurement methods.

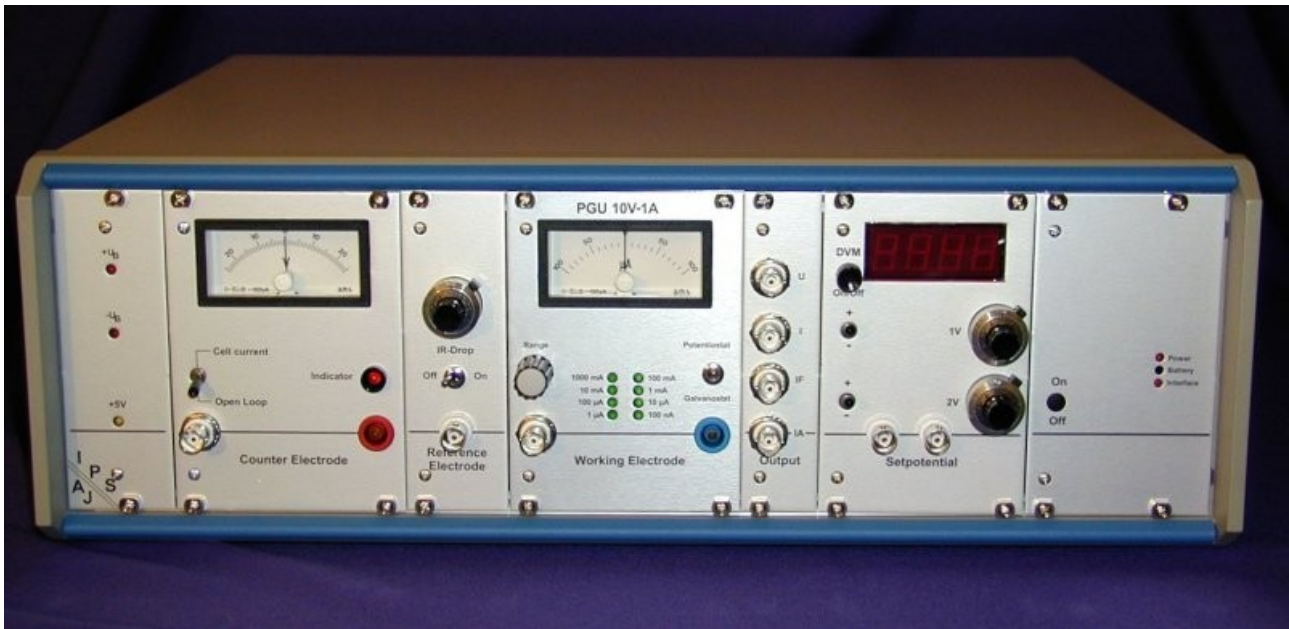

### Data overview:

- Potentiostat, galvanostat
- manual operation
- Control in- and outputs for external control
- fully automatic operation with built-in interface
- Mains operation, 115V / 230V

### Details:

Modulation:	$\pm 12V / \pm 1A$
Polarization range:	$\pm 10V$ potentiostat / $\pm 1A$ galvanostat
Current ranges:	6 ranges from 1A to 10 $\mu A$
Resolution:	10 $\mu A = 10000mV$ in the 10 $\mu A$ range, 1nA = 1mV
Input resistance RE:	10 <sup>13</sup> $\Omega$
Measurement outputs:	Potential, current, current with 40Hz filter, current with x10 amplifier
Inputs:	2 BNC connectors for external nominal potential